


Connector block assembly

*2 possible spacing for
double bass*




**PICKUP MUST BE SET UP
BY A PROFESSIONAL**

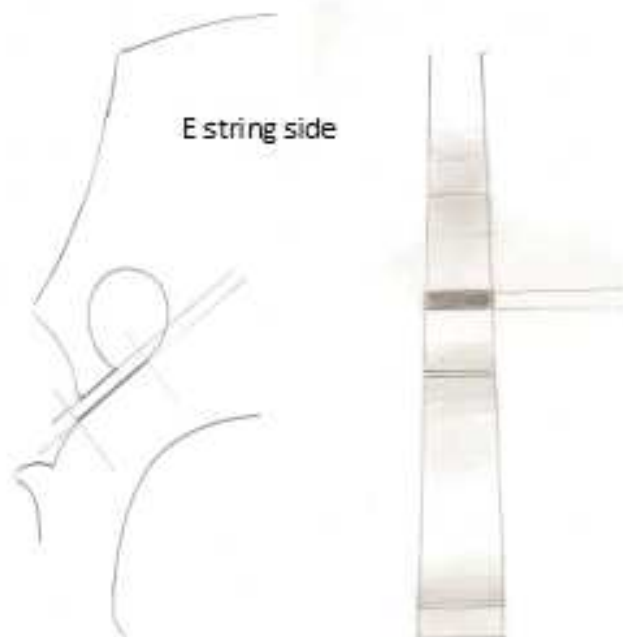

It will be necessary to watch quite particularly the parallelism of surfaces in contact. The pickup has to, during placement, force enough. Beware to not break the auricle during that operation. If the sensor is too loose and does not force enough, it can be tighten up with a thin piece of wood (or cardboard) on its top.

ATTENTION !

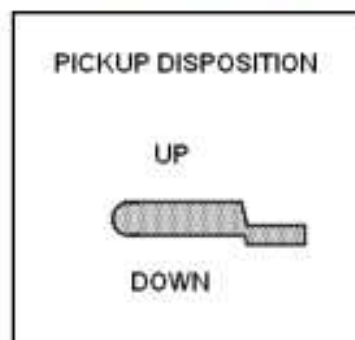

**The AMEKA Pickup will work
with any preamp system.
(a DI Box for example will be
fine)**

**Never pull the cable
or handle the sensor
by the cable**

*When fixing the pickup, some
paint may scratch off. It would
not affect in any case the
quality of the sound*

INSTALLATION MANUAL
<http://www.ameka.fr/support.html>